
BALLOON TYPE FLOAT SWITCH

 SPECIAL FEATURES: Hermitically Sealed
Prevents dust, dirt, moisture etc.
Low cost, easy installation.
Choice of Switches
Mercury / Micro / Reed The **DK's Balloon type Float Switch** has a body exterior made of a durable and oil/acid resisting synthetic compound. The device has been found extremely useful and dependable as a means for governing pumps and for signaling purposes. A weight body attached to the cable effectively prevents the cable from being sharply flexed. The switching elements to which the cable conductors are connected consist of a sealed micro / mercury / reed switch.

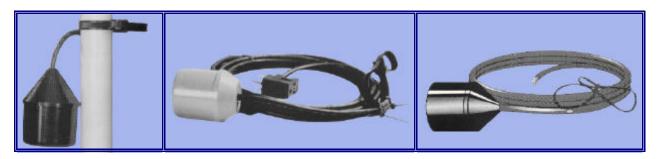

TECHNICAL SPECIFICATIONS

<u>MODEL - 4000</u>

Switch Type No. of Contacts Max. Rating Max. Resistance Operating Angle Cable Max. Working Pressure. Max. Working Depth Max. Working Temperature Float Mercury Switch / Reed Switch / Micro Switch 1 SPDT / 2 SPDT 2A 230V AC / 10 A, 250V AC / 5A, 230V AC / 0.25A, 220V DC 3 ohms. 35 ± 5°. Flexible PVC cable. 10 Kg/cm². 40 mtrs. 90°C. Polypropylene / PVC, etc.

OPTIONAL

- Process connection either screwed or flanged as per ANSI, DIN, JIS, BS, IS Standard.
- Current rating can be increased as per requirement.
- Material of construction as per requirement.



D. K. Instruments

69A, Selimpur Road, Dhakuria,

Kolkata - 700 031,West Bengal, India.

Ph. No.: 91-33- 2405 0944, Fax: 91-33-2415 2311.

E-mail: info@dkinstruments.co.in, Url: www.dkinstruments.co.in

Marketed By: